

JULY
2024



Harvey Thatch®

PRODUCT BROCHURE



BEWARE OF IMITATIONS!

Note the Harveytile Quality Stamp 





ROCK your Roof

Love the charm. Not the maintenance.

Nothing matches the African feel of thatch. It creates a warm atmosphere and is loved for giving a sense of character inside and outside the home, but ongoing maintenance, re-thatching, fire and lightning risk reduces the charm of natural thatch.

Harvey Thatch solves all these natural thatch roof problems by retaining the African look you love without the inherent drawbacks. Whether it's a new roof or re-roof, Harvey Thatch can be installed over natural thatch so you still have the charm and insulation properties within your home. As a durable, flexible light weight steel tile, Harvey Thatch provides excellent functional benefits.



Natural Thatch

Know your options and the implications before you begin. Natural thatch requires combing, maintenance and costly repairs. Damage and the decay of natural thatch caused by vermin and birds is unsightly and adds to maintenance costs. The use of Harvey Thatch Tiles also eliminates dust, a common occurrence with natural thatch.

Re-roofing A Thatch Roof

Everything that applies to new thatch roofs apply to re-roofing... and the hassle and disruption inside a home is invasive and disruptive for as long as the re-roofing process lasts.

Re-roofing using Harvey Thatch is hassle-free as the existing thatch is left intact ensuring no disruption to the interior of the building, and retaining the natural warmth.

Available in 4 Natural Stone Coat Colours



Light



Dark



Greystone



Midnight Black

Pictures displayed may vary from actual products due to the nature of natural stone. Production batches may have a colour variation from one batch to another.



Champagne Hotel, KwaZulu Natal



Skukuza Rest Camp, Kruger National Park

Harvey Thatch® is the preferred choice of roofing for acclaimed international lodges and reserves, such as the Kruger National Park and Champagne Hotel in Kzn. This has earned it the reputation as the superior thatch alternative.



Natural Stone Coat

In the constant battle against the elements, nothing stands up to nature like solid rock.

Harvey Thatch® roof tiles consist of a steel substrate coated in natural stone. The natural, unpainted stone coating will not fade and never needs painting. It provides a naturally beautiful and durable barrier for decades of environmental onslaughts. Stone coated tiles are immune to discolouration and offer superior grit adhesion.

The lightweight steel-based tiles reduce the weight burden on roof structures. This allows for savings on structural timber and foundations.



Harvey Thatch® Midnight Black



Harvey Thatch® Dark

Re-roofing with Harvey Thatch®



CSIR FireLab Test

Superior Fire Resistance

Natural thatch poses a significant fire risk to owners and occupants. Harvey Thatch gives you complete peace of mind as fire risk is reduced to a minimum. Harvey Thatch is certified with an 'A' Fire Rating, the highest roof material fire resistance as tested to SANS 10177-12 standard*.

*When installed to specification



Effects of lightning

Lightning will generally strike the highest object in an area, regardless of the material from which it is made. Harvey Thatch does not create nor attract lightning and if struck, is non-combustible. One does not require a lightning pole, however the roof should be earthed like all metal roofs. All wiring should be insulated.



Harvey Thatch® Light



Harvey Thatch® Greystone

Why Choose Harvey Thatch®?



Lightning Safe

- Non-combustible and fire resistant
- No need for lightning conductor
- Standard earthing required



Vermin, Bird & Pest Proof

- Water and airtight solution
- No access to the roof for vermin
- No need for unsightly chicken wire



Fade Proof

- Natural, uncoated stone
- Unaffected by the sun's UV rays
- Will not fade over time like painted roofs



Lightweight

- Lightweight steel-based roof tiles
- Save on roof-structure timber costs
- Ideal for new roof or re-roofing old roofs



Naturally Attractive

- A choice of 4 natural stone colours
- Shake Tile design for a thatch roof appearance
- Ridge, cap and trim accessories for a professional finish
- Use of natural stone as grit
- Beware of imitations that use coloured sand prone to fading.



Never Paint

- Natural stone coat
- Never needs painting



Low Maintenance

- Avoid the inconvenience of leaks
- Eliminates the need for thatch combing
- Never re-thatch



Unbreakable

- Unbreakable steel substrate
- Bonded stone granules protects against the elements
- No broken roof tiles



Solar Compatible

- Fixing brackets available



Weatherproof

- Gaps are eliminated
- Wind proof
- Hail resistant
- Water and leakproof
- No dust ingress
- Zero water absorption



Easy to Install

- Easily installed on new roofs or over an existing roof
- Engineered for effortless overlapping and fixing
- Lightweight for handling and on-site speed



20 Year Warranty

- Excellent functional benefits including a 20 year Product Warranty (Terms & Conditions apply).

A list of our approved installers is displayed on our website.

*Harvey Roofing Products are not responsible for incorrect installation or workmanship-related matters.





▲ Wild Fig, Skukuza Rest Camp refurbishment,
Kruger National Park



Before




After



Before



After

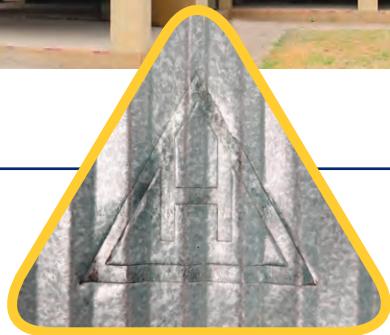

Look for the Harvey Quality Stamp.

We take great care to ensure that every Harveytile is manufactured to the most stringent quality standards. As a division of Africa's leading steel supplier, Macsteel, we have access to the best steel. We prepare and press the Zinc or Alu-Zinc coated steel to the finest tolerances, cover the tile with natural stone coatings and finally achieve the tile with the best appearance.

Once complete, we take care to quality check each tile so as to ensure that it meets our quality standards. Only then do we place our Harvey Quality Stamp on each tile.

This means you can rest assured that if the tile carries the Harveytile Quality Stamp, that it's a Harveytile manufactured to the most exacting standards. Look for the Harveytile Quality Stamp.

Some tile manufacturers (imported from China) use a coloured sand coating. To obtain a uniform film coating on a non-spherical mineral is almost impossible and will fade rapidly and unevenly when exposed to UV- rays.



Beware of inferior imitations!

Inferior quality imitations are presented to customers as "Harvey Tiles". These light gauge steel tiles are prone to damage, discolouration and loss of grit in the short term.

Please protect yourself by demanding our warranty for your own mind and protection!

**"If it doesn't say Harveytile,
it's not a Harveytile"**

Installation Guide

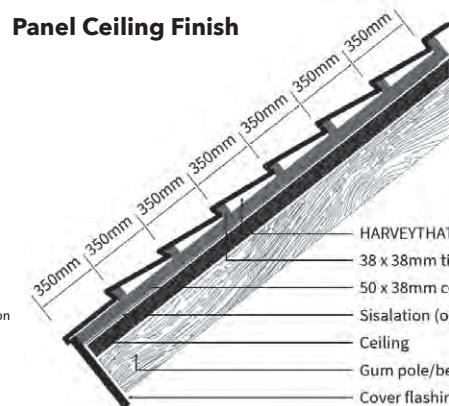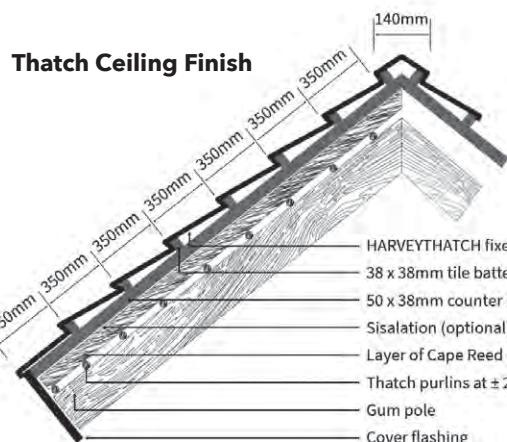


Technical Specifications

(Dimensions in mm)




Colours on screen and print may differ from the actual roof tile colour. Information may change without prior notice. Please confirm current specification for the latest information.

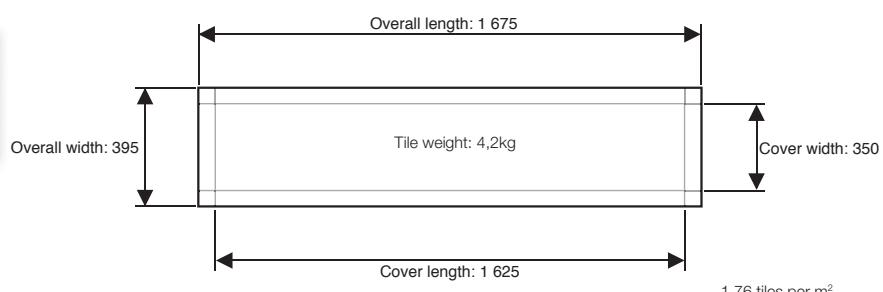


Accessories

1. Angle Ridge




Fixed to double batten at apex
Length: 1720mm (cover 1600)
Width: 125mm tapered lengthwise
Height: 95mm
Mass: 2.5kg

5. Bargeboard Cover




Left and right hand serrated. Fixed to barge boards at gable ends. Sketch shows right handed barge board cover.
Length: 1550mm Height: 130mm
Cover 4 tile courses
Mass: 2.3kg

2. Angle Ridge End Cap




Fixed to end of Angle Ridge
Width: 125mm
Height: 90mm




6. Sidewall Flashing

Left and right hand serrated. Sketch shows right handed sidewall.
Length: 1550mm Height: 115mm
Cover 4 tile courses
Width: 170mm Upper Lip: 10mm
Mass: 2.4kg

3. Angle Ridge Hip Cap




Fixed to double batten at hip battens
Length: 580mm (cover 1 per tile course)
Width: 125mm tapered down to 123mm
Height: 75mm tapered up to 105mm



7. Cover Flashing

For use at headwall and sidewall flashing as well as for short courses at ridge.
Length: 1720mm Width: 240mm
Upper Lip: 25mm Cover: 1600mm
Mass: 2.5 kg

4. Angle Hip End Cap



Fixed to end of Angle Hip
Width: 125mm
Height: 70mm



8. Solar Bracket

The Harvey Solar bracket is suitable for the application of solar panels and geysers. Manufactured from high tensile steel, there is no need to pierce the Harvey Roof Tile and risk a leaking roof. The Harvey Solar Bracket is easily fitted onto the timber or steel batten. Uniform Wind Uplift: 2Kn/m²



Harvey Roofing Products

A Division of Macsteel Service Centres SA (Pty) Ltd.

Tel: +27 11 741 5600

info@harveyroofingproducts.co.za

www.harveyroofingproducts.co.za

